


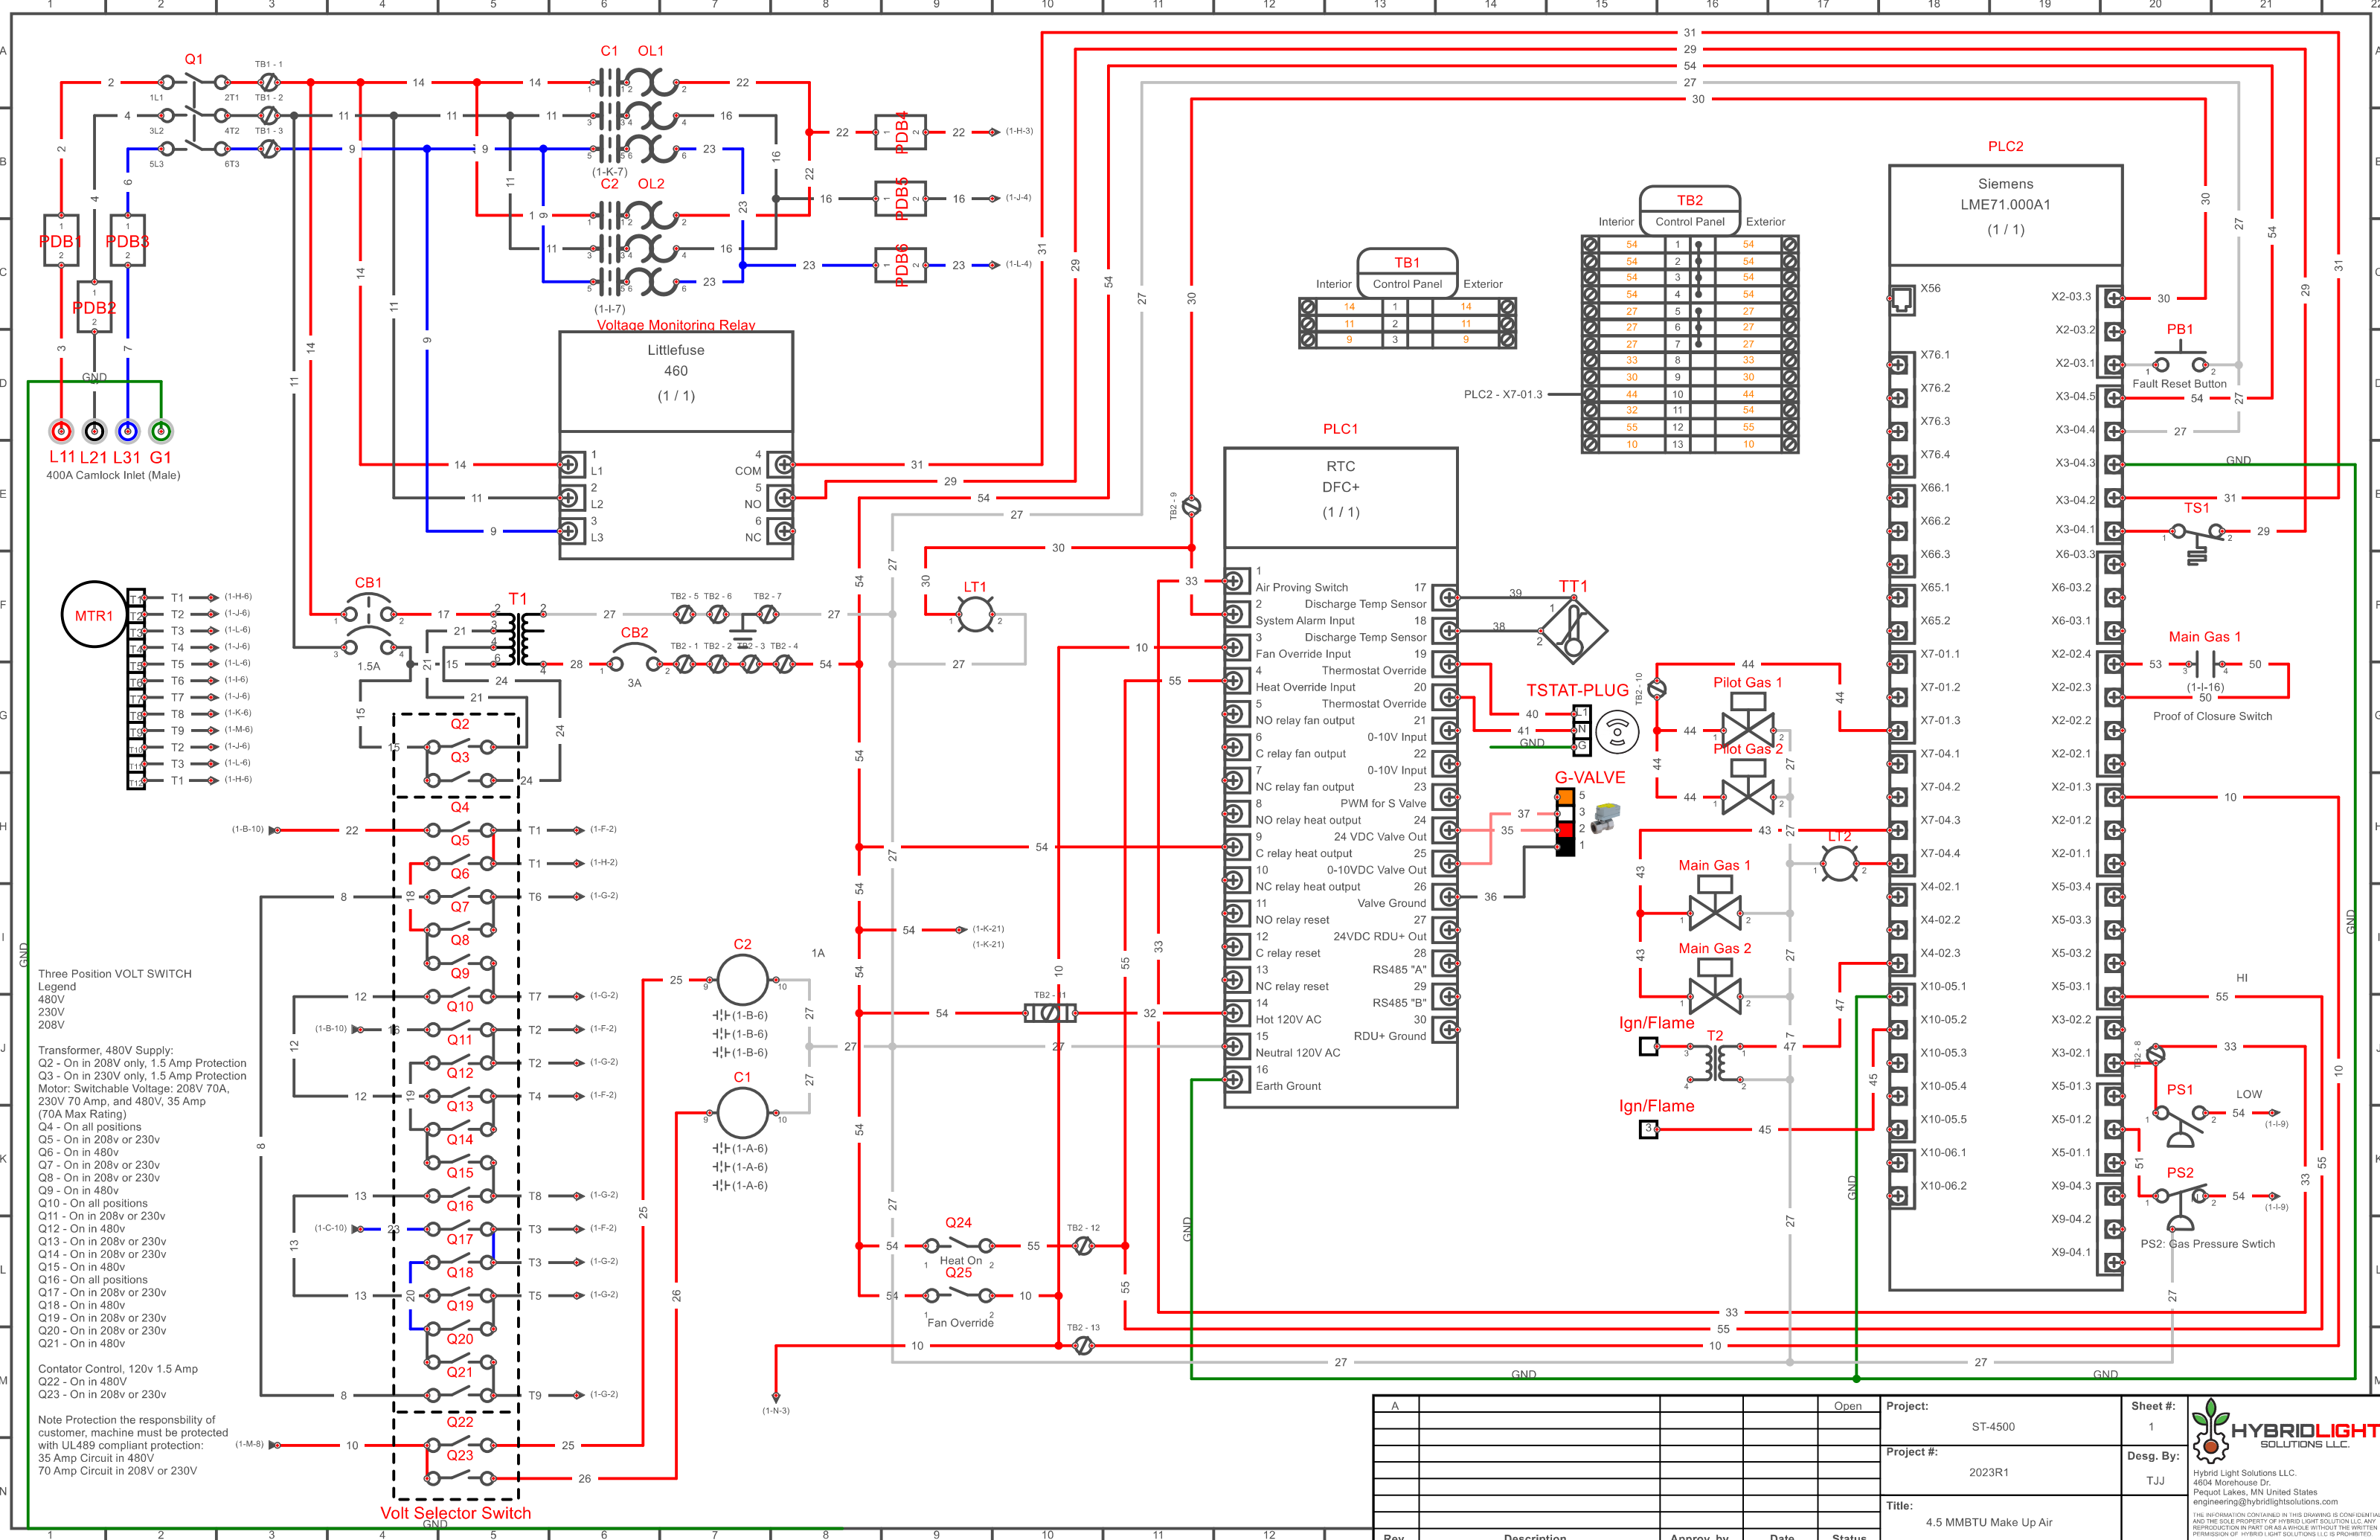

Three Position VOLT SWITCH
Legend
480V
230V
208V

Transformer, 480V Supply:
Q2 - On in 208V only, 1.5 Amp Protection
Q3 - On in 230V only, 1.5 Amp Protection
Motor: Switchable Voltage: 208V 70A,
230V 70 Amp, and 480V, 35 Amp
(70A Max Rating)
Q4 - On all positions
Q5 - On in 208v or 230v
Q6 - On in 480v
Q7 - On in 208v or 230v
Q8 - On in 208v or 230v
Q9 - On in 480v
Q10 - On all positions
Q11 - On in 208v or 230v
Q12 - On in 480v
Q13 - On in 208v or 230v
Q14 - On in 208v or 230v
Q15 - On in 480v
Q16 - On all positions
Q17 - On in 208v or 230v
Q18 - On in 480v
Q19 - On in 208v or 230v
Q20 - On in 208v or 230v
Q21 - On in 480v

Contactor Control, 120v 1.5 Amp
Q22 - On in 480V
Q23 - On in 208v or 230v

Note Protection the responsibility of
customer, machine must be protected
with UL489 compliant protection:
35 Amp Circuit in 480V
70 Amp Circuit in 208v or 230V

A				Open	Project: ST-4500	Sheet #: 1	 HYBRIDLIGHT SOLUTIONS LLC.
					Project #: 2023R1	Desg. By: TJJ	
					Title: 4.5 MMBTU Make Up Air		
Rev.	Description	Approv. by	Date	Status	THIS INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND THE SOLE PROPERTY OF HYBRID LIGHT SOLUTIONS LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HYBRID LIGHT SOLUTIONS LLC IS PROHIBITED.		